




VSSJAF (C2F) Double Flange Dismantling Joint

Model VSSJAF (C2F) | Standard stock + fast custom production



VSSJAF (C2F) standard configuration

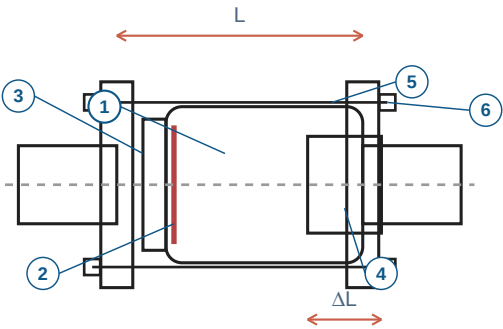

1 Body 3 Follower 5 Stud
2 Gasket 4 Limited short pipe 6 Nut
Structural & adjustment drawing reference

Key Supply & Configuration Data

Size	DN65-DN3200 standard reference; custom sizes to requirement
Connection	Double flange
Face-to-Face	Standard L series + custom length to approved drawing
Adjustment	Standard ΔL by size; project-specific adjustment available
Flange Standards	GB / DIN / EN / ANSI / ASME / JIS / BS
Pressure	0.6 / 1.0 MPa catalog reference; project-specific options
Materials	Body, seal, fasteners and coating selected to project requirements
Production	Common items in stock + fast custom production

Stock & Custom Production

- Common sizes and configurations are kept in stock for immediate shipment.
- Custom production can start the same day after drawing and specification confirmation.
- Size, flange standard, pressure class, materials, coating and connection details can be made to project requirements.



Standard Dimensions & Adjustment Reference

VSSJAF (C2F) standard dimensional reference. Custom dimensions available to approved drawings.

Standard Size & Adjustment

All dimensions in mm

DN	Pipe O.D. Dw	L	ΔL
65	76	200	40
80	89	200	40
100	114	200	40
125	140	200	40
150	168	200	40
200	219	200	40
250	273	200	40
300	325	220	50
350	377	220	50
400	426	220	50
450	480	220	50
500	530	220	50
600	630	240	50
700	720	240	50

DN	Pipe O.D. Dw	L	ΔL
800	820	350	60
900	920	350	60
1000	1020	350	60
1200	1220	370	60
1400	1420	370	60
1600	1620	380	60
1800	1820	380	60
2000	2020	400	60
2200	2220	400	60
2400	2420	400	60
2600	2620	450	80
2800	2820	450	80
3000	3020	450	80
3200	3220	450	80

Reference series: L = 200 / 220 / 240 / 350 / 370 / 380 / 400 / 450; ΔL = 40 / 50 / 60 / 80 by size group.
Final dimensions and flange drilling are confirmed by order specification or approved project drawing.

Available Flange Standards

GB / DIN / EN / ANSI / ASME / JIS / BS

Flange dimensions, drilling patterns, materials and pressure classes can be supplied to the specified standard or approved customer drawing.

Fast Supply

Stock items: immediate shipment.
Custom: same-day production scheduling available after drawing and specification confirmation.
RFQ: size / flange / pressure / material / coating / qty.

For detailed technical requirements, custom configurations or project questions, please contact us.